



# FURUNO®

## Inmarsat-C MOBILE EARTH STATION Model FELCOM 15

- Full coverage of Inmarsat-C services: EGC, Internet E-mail, distress message handling, polling, and data reporting
- General data exchange, telex, etc.
- GMDSS compliant with optional printer, AC/DC power supply unit
- Shipborne LAN connection by Ethernet 10Base-T
- 10.4" COLOR LCD Display Unit for improved legibility of incoming and outgoing messages
- GPS position reporting
- Remote distress alert unit
- Two component system allows easy installation
- Optional software for Windows PC to run E-mail/Telex
- Optional internal GPS module



The FELCOM 15 is FURUNO's new Inmarsat-C Mobile Earth Station. It provides a high quality two-way telex and data link between ships and other parties at sea or on land. All functions and services of the Inmarsat-C system are provided: EGC (Safety NET™/FleetNET™), distress message handling, two-way digital store-and-forward messaging including polling, data reporting, E-mail, etc.

Distress alert are initiated by the remote distress alert unit. The distress message including own ship's position is easily edited. A PC can be used for editing the message via Ethernet when it is supplied with dedicated software.

The FELCOM 15 consists of an antenna and display unit with keyboard. The display unit embodies a 10.4" color LCD and processor unit. The distress alert button is incorporated in the display for emergency. Data files and utility program on floppy disks are easily loaded into the processor through the front loading disk drive in the display unit. The compact design of display unit and omni-directional antenna unit offer space-saving installation. An optional GPS module is available for position reporting without operator's intervention. GMDSS compliance can be achieved by adding a printer and a AC/DC power supply unit.



The future today with FURUNO's electronics technology.

### FURUNO ELECTRIC CO., LTD.

Catalogue No. W-3247c

TRADE MARK REGISTERED  
MARCA REGISTRADA

# SPECIFICATIONS OF FELCOM 15

## Rule and Regulations

Complies with IMO Res. A.807 (19) Inmarsat-C, A.664 (16) EGC Performance Standards, A.694 (17) General requirements, MSC.68 (68), MSC/Circ 862, MSC 55/25 Inmarsat, IEC 61097-4 Inmarsat-C/EGC

## Class Identification

Felcom 15 is Class 2 Inmarsat-C SES

(For info Class 0: EGC, Class 1: Basic SES, Class 2: Basic SES + EGC, Class 3: Basic SES + independent EGC)

## Inmarsat-C Services Supported

- EGC receiving (SafetyNET™, FleetNET™)
- Distress message handling
- Two-way, digital store-and-forward message handling: Telex, FAX (PSTN), Internet E-mail, X.25 (PSDN), X.400 (MHS), Closed Network (DNID), Special Access Code
- Polling, Data Reporting

## Frequency

TX: 1626.5 - 1646.5 MHz

RX: 1530.0 - 1545.0 MHz

## Channel Spacing

5 kHz

## Modulation

BPSK 600/1200 symbols/s

## Output Power

17 W at final amplifier

## Editing

Message editing, File protection by password, Easy editing by cut, paste, copy, search and replace commands

## File Management

Adding, modifying and deleting, List and print files, Available memory count, Transferring data between memory and floppy disk

## Utility Programs

System status indication, System diagnostic, Performance verification test (PVT), Commissioning sequence, Station list, Log book

## Interface

RS-232C

1 port for EGC printer, PC

Ethernet 10Base-T

1 port for PC or LAN

IEC 61162:

1 port

BWC, BWR, DBT, GGA, GSV, GLL, MTW, RMA, RMB, RMC, WPL, VDR, VTG, ZDA

## Display Unit IC-215

Display:

10.4" color LCD (207 x 160 mm)

Message:

72 characters/line, 25 lines/screen

## Printer PP-510

Mandatory for EGC operation as required by IMO Res. A.664 (16).

Printing paper: Rolled, impact dot, 216 mm wide, 80 characters/line

**Power Supply Environment** (IEC 60945 test method)

Temperature: -15°C to +55°C (Protected units)

-35°C to +70°C (Exposed units)

## Equipment List


### Standard

- |  |        |
|--|--------|
| 1. Antenna Unit with 30 m Cable          | 1 unit |
| 2. Terminal Unit with Keyboard           | 1 unit |
| 3. Junction Box                          | 1 unit |
| 4. Distress Alert/Received Call Unit     | 1 unit |
| 5. Alarm Unit                            | 1 unit |
| 6. Installation Materials and Spare Part |        |

### Option


- |   |
|---|
| 1. GPS Board Kit OP16-24                            |
| 2. Printer PP-510                                   |
| 3. Software for PC                                  |
| 4. Antenna Cable 8D-FB-CV (50 m), 12D-FB-CV (100 m) |
| 5. AC/DC Power Supply Unit PR-240*                  |

\* Required for EGC, IMO Res. A.664 (16)/4 to operate on ship's mains

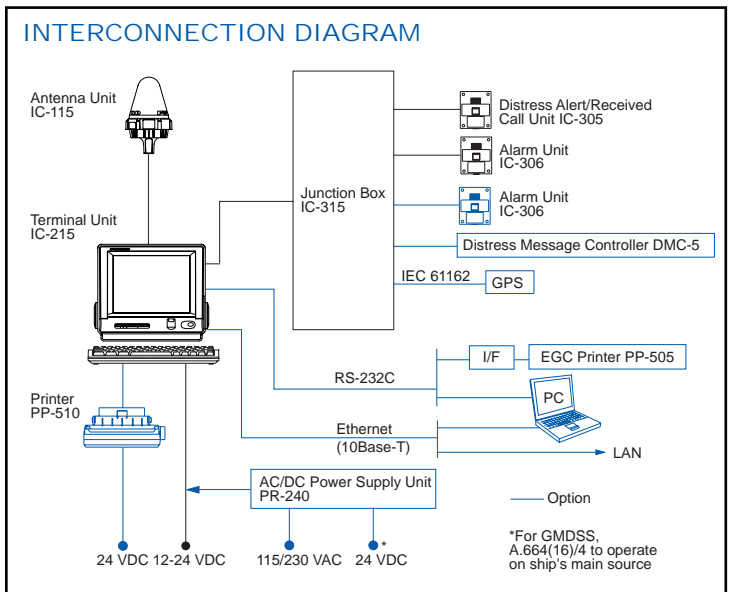


## Antenna Unit IC-115

1.4 kg 3.1 lb




## Terminal Unit IC-215

4.5 kg 9.9 lb

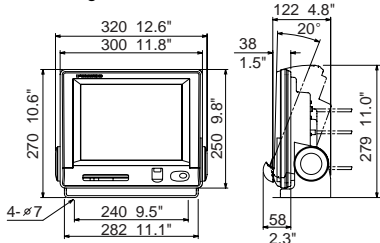


## Junction Box IC-315

0.7 kg 1.5 lb




## Printer PP-510

3.3 kg 7.3 lb

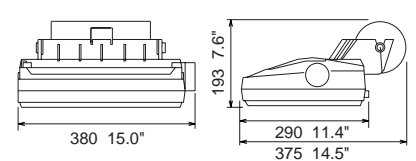


## Alarm Unit IC-306

0.33 kg 0.7 lb



## Distress Alert/Received Call Unit IC-305

0.34 kg 0.8 lb



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

FURUNO U.S.A., INC.

FURUNO ESPAÑA S.A.

FURUNO SVERIGE AB

04125N Printed in Japan

FURUNO (UK) LIMITED

FURUNO DANMARK AS

FURUNO FINLAND OY

大连宁航通导科技发展有限公司

大连市中山区常青街8号23F-05

T:0411-82568595 F:0411-82561282

Http://www.wesmar.cn

Email: sales@wesmar.cn

FURUNO FRANCE S.A.

FURUNO NORGE A/S

FURUNO POLSKA Sp. Z o.o.