

**FURUNO®**

Terminal Box  
DS-802

TTYCY-28°  
Max 150 m

Option

\* To be arranged

# DOPPLER SPEED LOG

Doppler Speed Log

## DS-80



The future today with FURUNO's electronics technology.

**FURUNO ELECTRIC CO., LTD.**

Catalogue No. M-1520f

TRADE MARK REGISTERED  
MARCA REGISTRADA

- Speed and distance run indicated on a large illuminated LCD display
- Compact display unit and transducer
- High accuracy by utilizing the Doppler principle, paired beam eliminating effect of pitching, and velocity correction for change of water temperature
- Easy speed correction at mile post run

- Speed output to ARPA, radar, ECDIS, AIS, VDR, GMDSS equipment, etc.
- Complies with IMO standards MSC.96 (76), A.824 (19), A.694 (17), IEC 61023 and other related standards
- Fully meets SOLAS carriage requirement for ships over 300GT
- Fits to the hull either directly or with a gate valve

## SPECIFICATIONS

- |                     |  |
|---------------------|--|
| 1. Measuring System | Paired-beam Doppler log, 1 MHz   |
| 2. Display unit     | 4.5" (95 x 60 mm) Monochrome LCD<br>120 x 64 pixels  |
| Character size:     | 15 or 21 mm high selectable  |
| 3. Speed Range      | 0 - 40 kt, 0.1 kt steps  |
| Forward:            | 0 - 10 kt, 0.1 kt steps  |
| Astern:             | 0 - 10 kt, 0.1 kt steps  |
| 4. Distance Run     | 0-999,999.99 nm,<br>resettable to any value.   |
| 5. Accuracy         | Speed through-the-water (STW):<br>1%, display resolution 0.1 kt<br>Distance run: 1%, in steps of 0.1 nm<br>Deeper than 3 m |
| 6. Water Depth      |  |
| 7. Correction       | Automatic correction for change of<br>water temperature  |
| Sound velocity:     |  |
| Mile post run:      | ±10% on menu   |
| 8. Test             | -10 and 40 kt  |
| 9. Power Supply     | 115/230 VAC  |
| 10. Interface       | IEC 61162-1  |
| Output:             | VBW, VLW   |

## ENVIRONMENT (IEC 60945 test method)

- |               |                                  |
|---------------|----------------------------------|
| Temperature   | -15°C to +55°C (Display unit)    |
| Waterproofing | Display unit; IPX5 CFR-46 (USCG) |

## EQUIPMENT LIST

### Standard


- |  |        |
|--|--------|
| 1. Main Display DS-800                             | 1 unit |
| 2. Transducer Unit DS-820<br>with 10/20/30 m cable | 1 unit |
| 3. Transceiver Unit DS-810                         | 1 unit |
| 4. Distribution Box DS-801                         | 1 unit |
| 5. Terminal Box DS-802                             | 1 unit |

### Option

- |                                     |        |
|-------------------------------------|--------|
| 1. Digital Indicator DS-830         | 1 unit |
| 2. Remote Distance Indicator DS-840 | 1 unit |
| 3. Transducer Tank DS-850           | 1 unit |
| 4. Flush Mount Kit F type or S type | 1 unit |
| 5. Gate Valve DS-782, DS-786        | 1 unit |
| 6. Junction Box CI-630              | 1 unit |
| 7. Analog Display                   | 1 unit |


## TRANSCIVER UNIT

**DS-810**  
8.0 kg, 17.6 lb




## DISTRIBUTION BOX

**DS-801**  
14 kg, 30.9 lb




## INTERCONNECTION DIAGRAM

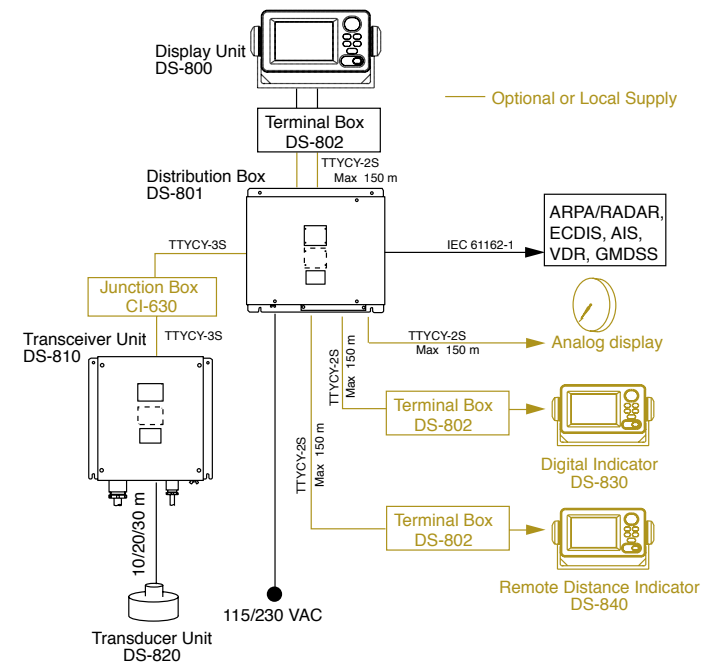


## DISPLAY UNIT DS-800

0.6 kg, 1.3 lb

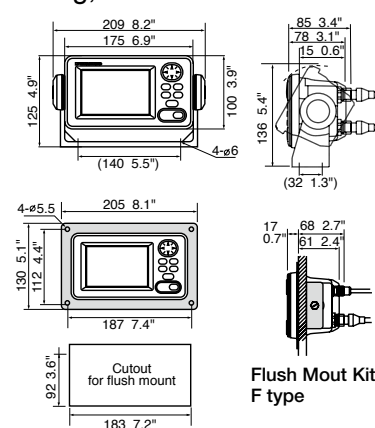


## GATE VALVE DS-782

75 kg, 165.3 lb



**DS-786**  
40 kg, 88.1 lb



SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE